



ICY BOX IB-AC515a

DisplayPort™ 1.2 to VGA Adapter

Key features

- Adapts DisplayPort (Input) to VGA (Output)
- Supports VESA & CEA timing standards up to UXGA and resolution 1920x1200@60Hz
- Supports Mirror and extended mode
- Active mode to translate the exact DP signal to VGA signal
- Support DP 1.2, VESA DDM & EDID 1.4
- Support main link rates of 2.7 Gbps & 1.62 Gbps from source
- Plug and Play



Packing content
1x IB-AC515a

Function

The adapter converts a DisplayPort™ to a VGA Port and connects i.e. a MacBook® with a beamer.


Technical data

Model IB-AC515a
Article no. 60477
EAN code 4250078168591
Brand ICY BOX

Resolution Full HD 1080P
Colour Black
Interface DisplayPort™ 1.2 to VGA
Material Plastic



ICY BOX **IB-AC515a** DisplayPort™ 1.2 to VGA Adapter

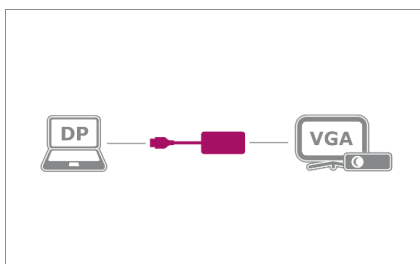

The DisplayPort™ can...

do a bit more, as the name says. It does not only transmit video signals, but audio as well. In combination with VGA, only video is transmitted of course, since VGA is unable to transmit any audio signals.



Active is hip

The IB-AC515a has an active chipset, which is responsible for the precision of the transmission from DP 1.2 to the VGA interface. Mirroring or expanding modes for the screens are both supported.



So why VGA?

Because discarding older screens is not always a necessary option. Some even support Ultra HD. If so, this adapter exhausts the maximal capacity of VGA. It furthermore supports UXGA and reaches a resolution of up to 1920x1200p@60 Hz.

Logistical data

Packing unit: 50 pcs./carton
Total weight: 5.3 kg/carton
Gross weight (with packing): 0.86 kg
Net weight: 0.027 kg

Dimension/carton: 440x380x230 mm
Dimension (with packing): 200x100x25 mm
Dimension of article: 50x25x13 mm
Country of origin: China